


. Problem Solving Process

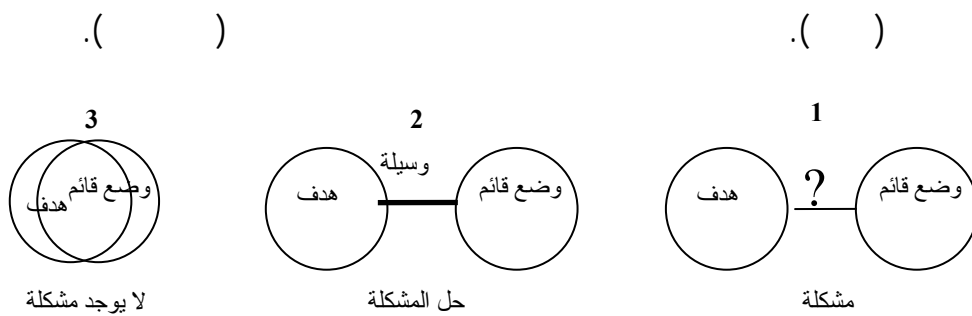

¹ Mitchell, Computer Aided Architectural Design, pp.28

- :

.

:

Model

()

...

.

.

..

.

()

.

() ()

.() .

ب- تحديد الهدف:

()

.

....

)

.

(...

.

¹ Mitchell, Computer Aided Architectural Design, pp.38

الصياغة الكمية للهدف:

()

... .

()

()

.

.

:

- المعيار (أو متغير الهدف)¹

).

(

ب- المحددات

()

()

:

%

/

.

()

/

¹ Taha, Operations Research, pp.17

.

.

()

.

.

.

.()

:

.()

()

:

.()

.

()

.

()

()

.()

()

- إقتراح الحلول والبدائل¹

()

()

- تقييم الحل²

()

¹ Mitchell, Computer Aided Architectural Design, pp.29

² Mitchell, Computer Aided Architectural Design, pp. 49

-

.

.

-

(Disc)

)

. (o-disc) (Disc

-

:

2 -è

()

.()

-é

()

()

¹ Markus & Morris, Building, Climate and Energy, pp.48

² Markus & Morris, Building, Climate and Energy, pp.479

(0 energy house)

.

.

-: Ô

.

-: -

!

Ô

.

-: -

!

.

(- -)
(-)

(Invironmental Impact

Assessment)

!

!

:

è.

:

(- -) :

:

:

¹ Taha, Operations research, pp.7

()

(- -)

— ∴ —

— ∴

”

”

— ∴

”

”

.

”

”

.

æ

.

.

.

()

.

:

¹ Watson & Labs, Climatic Design, pp. 26
² Markus & Morris, Building, Climate and Energy, pp.47
³ Olgyay, Victor: Design with Climate, pp. 14

-:

-:

-

-:

-è

Dry)

. (DBT) (Bullb Temperature

.

° î -)

(-

-

(° - ë)

.

.

-:

-é

(

)

)

.

(

.

.

.

%

.

. %

%

-: %

.

-: %

.

-: -ê

-

-

.

-

-

.

/ / ,

/

.

.

/ ë-

.

/

-: -ë

.

()

$$\begin{aligned}
 & \cdot \\
 &) \\
 & (\text{ } \text{ }) \\
 & (\text{ } \text{ }) \\
 & \cdot \\
 & .(\text{ } \text{ })
 \end{aligned}$$

(MRT) Mean Radiant Temperture

$$(\text{ }) .$$

Globe Temperature


$$\begin{aligned}
 & \cdot \\
 & (\text{ } \dots \text{ }) \\
 & (\text{ }) \\
 & \text{MRT}
 \end{aligned}$$

-:

$$T_s = T_a + D_{\text{MRT}}$$

$$D_{\text{MRT}} = (\text{MRT} - T_a) / 1.25$$

¹ Koenigsberger, Manual of tropical Housing and Building, pp.53

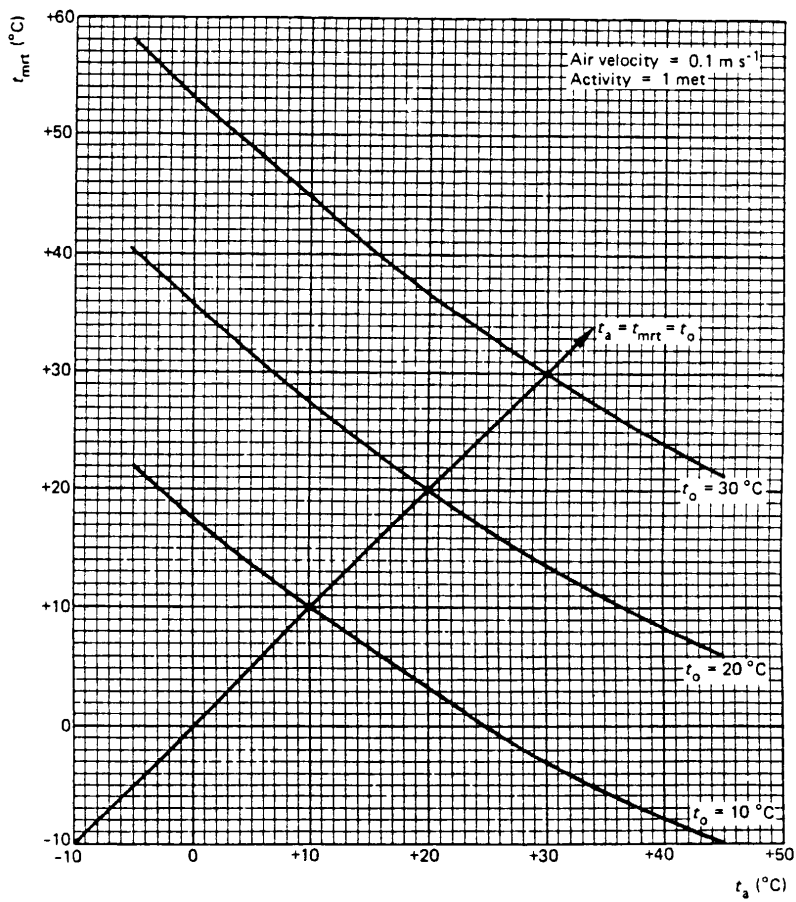

¹ (é-é)

-:

-

-:

-è

-:

-

-

¹ Markus & Morris, Building, Climate and Energy, pp.77

()

Metabolic (/ í) ,
"Met"
.Met / í " " / Rate
:
-é

. / æ ()
."Clo"

1 Clo = .155 m2 c / w
5 Clo. 0 Clo
.(-)

1-:

Ô

()

"

"

()

()

.

.()()


:

SET -:

() / , %
() ,í

(Met =)

.

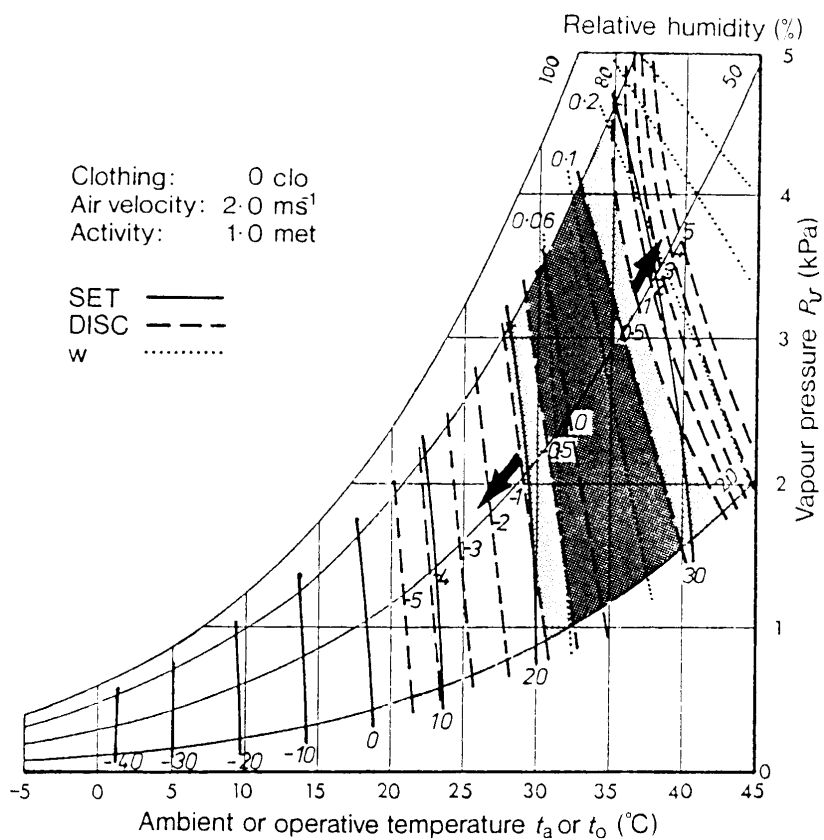

(-)

)

(

)

(

/

w))

DISC

SET

1

(SET)

ASHRAE

Ö

Ö í

ASHRAE

SET

¹ Markus & Morris, Building Climate and Energy, pp.87

Discomfort scale :¹

SET

(-)

%

- + , -

%¹

- +

%

()

)

(, ±

)

(

)

(

(i ð

SET

-ë

)

(

:

Decrement factor

è

)

(

Time lag

Decrement factor

(,) ë í

ë

.

()

()

æ

()

æ

. æ

.

,

-

ë

.

)

ë

æ - æ

-

)

(

öö

.(æ

.

.

.

-:

.

.

.

.

.()

.

.

.

-:

.

.

.

.

.

æ

()

(). ë

(æ)

(æ - æ)

.()

()

()

.

.

.

SET

.¹(DISC SET)

.

.

.

.

.() × () -; ²

()

.

-;

×

()

. á ()

¹ Markus & Morris, Building, Climate and Energy, pp.52

-ë

)

(

:

Decrement factor

è

)

(

Time lag

Decrement factor

(,) ë í

ë

.

()

()

æ

()

æ

. æ

.

,

-
ë

.

) ë æ - æ
-)

(

öö

.(æ

.

.

.

-:

.

.

.

.

.()

.

.

.

-:

.

.

.

.

.

æ

()

(). ë

(æ)

(æ - æ)

.()

()

()

.

.

.

SET

.¹(DISC SET)

.

.

.

.

.

.() × () -; ²

()

.

-;

×

()

. á ()

¹ Markus & Morris, Building, Climate and Energy, pp.52

-ì

:-

.

()

.

-:

-

"

"

.

:

-

-

(ë)

(Split Unit)

(Window Type)

.

.

-: ôôô

.

.

.

.

.

"

(ööö)

.

.

()

(öö).

-:

-

()

.

(... - -)

-ô

.

.

-:

-è

.

"

"

"

"

"

"

-

-

.

"

"

.

-:

-é

.

.

-:

-ê

.

.

.

.

-:

-ë

.

(

)

.

.

-:

Cost In Use Annual

() -:

Equivilant

.

.

.

-í

" "

()

.

.

.

()

.

-:

"

" "

"

.

"

"

" "

.

.

-:

()

.

.

" "

.

)

.(...

.

" ... - "

" "

.

.

.

Base Case ()

.

حساب الجدوى الإقتصادية للمعالجات المناخية :-

-:

-

.

:

-

(

.

.

*

=

)

)

-

(

. . . .

.

.

.